

## TRANSPONDER EQUIPMENT

**Publication number:** JP2000078055 (A)

**Publication date:** 2000-03-14

**Inventor(s):** HECHT JOHANNES; KOLLBACH DIETBERT

**Applicant(s):** DAIMLER CHRYSLER AG

**Classification:**

- **international:** **H04B1/59; G06K17/00; G06K19/07; H04B5/00; H04B5/02; H04B1/59; G06K17/00; G06K19/07; H04B5/00; H04B5/02; (IPC1-7): H04B1/59; H04B5/02**

- **European:** G06K19/07T; H04B5/00

**Application number:** JP19990231812 19990715

**Priority number(s):** DE19981032628 19980721


**Also published as:**

JP3564636 (B2)  
FR2781622 (A1)  
US6411212 (B1)  
ITRM990454 (A1)  
GB2342537 (A)

[more >>](#)

Abstract of **JP 2000078055 (A)**

**PROBLEM TO BE SOLVED:** To obtain transponder equipment by which a large reach distance is realized in spite of a short stay time inside an inquiry electromagnetic field without an intrinsic first energy source. **SOLUTION:** A transponder TR arranged in the object of transponder equipment includes a chargeable energy storage device SP and obtains power from the device SP for at least a transmission operating mode. A pump circuit PS is connected to object side energy sources Z and M in order to charge the device SP on the object side, a charging signal is generated and energy is transmitted by induced coupling via a coupling circuit KS3 connected to the pump circuit PS and the coupling circuit KS1 at the side of the transponder by the charging signal.

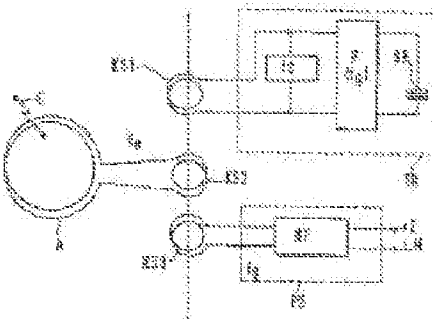

.....  
Data supplied from the **esp@cenet** database — Worldwide